

Sight Flow Indicators (straight line)

with loose connecting flanges (B) DIN PN10

NORIS

Bauform 108-B

Application:

Sight Flow Indicators are used for optical control and the observation of filling and current in pipelines.

Operating conditions:

Working pressure : 10 bar
Working temperature: 150°C or 280°C

Installation:


Optional. Take care of flow direction

Options:

Other materials
Compl. in stainless steel
Sight glass light-fitting
Spinner or Flap

Materials:

Body	WN 1.4404 / 1.4571
Loose flanges	DIN 2642; PN 10; RSt 37-2 galvanized
Covers	RSt 37-2 / C 22.8 galvanized
Screws	DIN 912, steel
Glass	Borosilicate glass acc. to DIN 7080 Soda lime glass acc. to DIN 8902
Gasket	Graphite (or other materials)

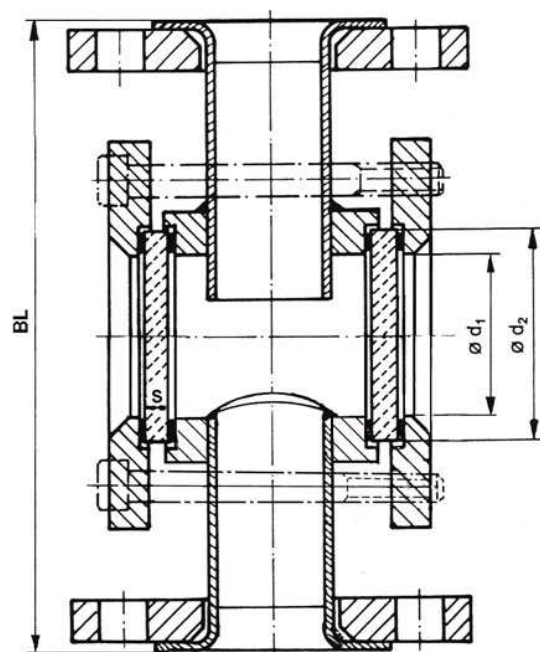

Ordering example:

Sight flow indicators Bauform 108-B
Body stainless steel, cover and flanges steel
borosilicate glass 10 bar
DN 50 PN 10



Dimensions:

DN	BL	Glass plate		S	Screws	Weight ca. Kg
		Ø d ₁	Ø d ₂			
15	130	32	45	10	M 8	4,1
20	150	48	63	10	M 10	4,5
25	160	48	63	10	M 10	6,7
32	180	65	80	12	M 10	8,4
40	200	65	80	12	M 12	8,7
50	230	80	100	15	M 12	10,9
65	290	80	100	15	M 12	12,9
80	310	100	125	15	M 12	18,1

Further sizes on Bauform 112-B

Modification reserved

NORIS ARMATUREN Burkenstein GmbH & Co. KG

Puscherstrasse 3
D-90411 Nürnberg

Telefon: +49 (0) 911 / 52 150 63
Telefax: +49 (0) 911 / 52 24 40

Internet: Noris-Armaturen.de
E-Mail: Noris@Noris-Armaturen.de