

**Sight Flow Indicators** (straight line )  
with flanges connecting **DIN PN 16**

**NORIS**

Bauform 108

**Application:**

Sight Flow Indicators are used for optical control and the observation of filling and current in pipelines.

**Operating conditions:**

Working pressure: 16 bar  
Working temperature: 150°C or 280°C

**Installation:**

Optional. Take care of flow direction

**Options:**


Other materials  
Sight glass light-fitting  
Spinner or Flap

**Materials:**

Body	WN 1.4404 / 1.4571
Flanges	DIN 2633; WN 1.4571
Covers	Stainless steel
Screws	A4
Glass	Borosilicate glass acc. to DIN 7080 Soda lime glass acc. to DIN 8902
Gaskets	Graphite ( or other materials )

**Ordering example:**

Sight flow indicators Bauform 108  
Stainless steel, borosilicate glass  
DN 50 PN 16

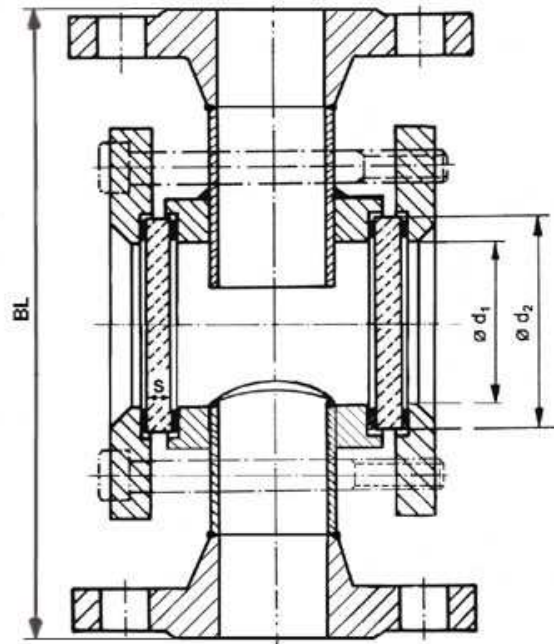

**Dimensions:**

DN	BL	Glass plate			Screws	Weight Kg
		$\varnothing d_1$	$\varnothing d_2$	S		
25	160	48	63	10	M 10	6,7
32	180	65	80	12	M 10	8,4
40	200	65	80	12	M 12	8,7
50	230	80	100	15	M 12	10,9
65	290	80	100	15	M 12	12,9
80	310	100	125	20	M 12	18,1

Further sizes on Bauform 112

Modification reserved

**NORIS ARMATUREN Burkenstein GmbH & Co. KG**

Puscherstrasse 3  
D-90411 Nürnberg

Telefon: +49 (0) 911 / 52 150 63  
Telefax: +49 (0) 911 / 52 24 40

Internet: Noris-Armaturen.de  
E-Mail: Noris@Noris-Armaturen.de